

HOLDEN



LEVEL DECK SHOWN

OPTIONAL EQUIPMENT SHOWN

Folding Neck Lowboy

40-50-60 Ton

Our Goal at Holden Industries is ... To build a trailer you can be proud of for many years to come.

Our Manufacturing Policy is ... To provide the best trailer money can buy for your dollars invested.

*"Don't be Confused by Look Alikes
— Buy the Best."*

*"Custom Trailers — Tailored to Your Needs"
Since 1969*

Holden Industries incorporated in Missouri in 1969, separating from its parent company which dated to the early 1950's. Holden Industries presently builds both commercial and government trailers at two factories in Southwest Missouri. The commercial line includes over 40 standard models plus many custom-designed units. Government models have fulfilled needs of all branches of U.S. Military, as well as NASA, TVA and other domestic and foreign government and quasi-government concerns.



HOLDEN INDUSTRIES, INC.

ROUTE 1, BOX 151
SOUTHWEST CITY, MISSOURI 64863

800-488-4487

DEALER INFORMATION



HOLDEN TRAILERS

"Built as Tough as the Load They Haul"

50-60 TON

**INQUIRE FOR
OTHER SIZES**

SPECIFICATIONS

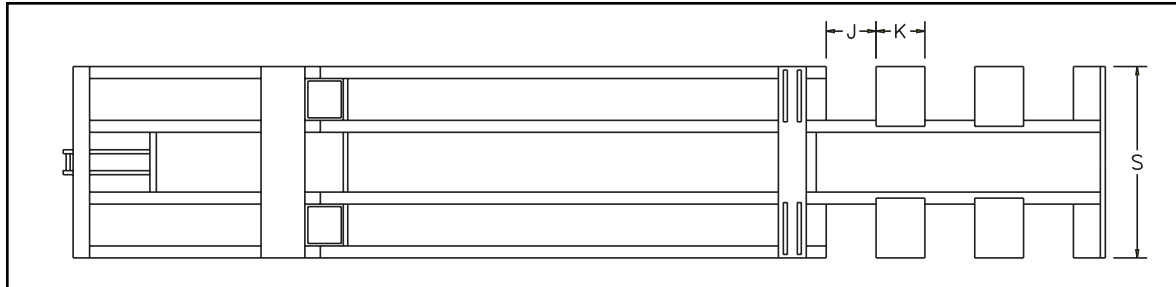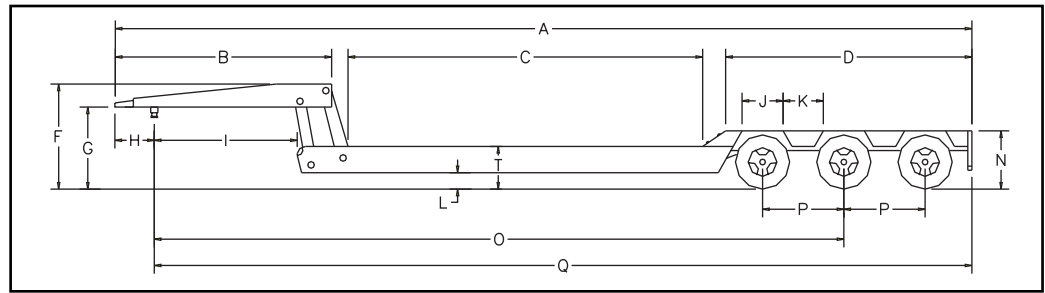

50 TON MODEL

A	48' 1 1/2"
B	10' 6 1/2"
C	22'
D	12' 8"
E	N/A
F	67"
G	51"
H	18"
I	87"
J	30"
K	20"
L	10"
M	N/A
N	38 1/2"
O	40'
P	49 1/2"
Q	46' 7 1/2"
R	102"
S	102"
T	28"

60 TON MODEL

A	48'
B	10' 11"
C	22'
D	12' 4"
E	N/A
F	69"
G	51"
H	18"
I	87"
J	30"
K	20"
L	10"
M	N/A
N	41"
O	39' 10"
P	50"
Q	46' 4"
R	102"
S	102"
T	31"

50 Ton FOLDING NECK -

**Triple Axles HMF 50
50 TON STANDARD SPECIFICATIONS
WEIGHT: 22,750 LBS.**

FRAME:

18" Wide flange main and outer rails
22' Platform ahead of axle openings
Double-drop design
Hardwood Floor
Wide bolster in axle area
Tapered Nose
8 Heavy duty lashing rings per side
DOT bumper and mud flaps

RUNNING GEAR:

25,000# Nominal Axles with 16 1/2" x 7" air brakes
Automatic slack adjusters
Antilock Braking System: 2S1M
Heavy duty spring beam suspension
10 hole outboard hubs, stud piloted
255/70R x 22.5 LR H tires on 8.25x22.5 disc wheels

ELECTRICAL SYSTEM:

7-Way electrical connector
Moisture-proof wiring system
Circuit breaker-protected lighting system
Sealed beam lights to DOT specifications
Wiring to DOT specifications

60 Ton FOLDING NECK -

**Triple Axles HMF 60
60 TON STANDARD SPECIFICATIONS
WEIGHT: 23,650 LBS.**

FRAME:

21" Wide flange main rails & 18" Outer rails
22' Platform ahead of axle openings
Double-drop design
Hardwood Floor
Wide bolster in axle area
Tapered Nose
8 Heavy duty lashing rings per side
DOT bumper and mud flaps

RUNNING GEAR:

25,000# Nominal Axles with 16 1/2" x 7" air brakes
Automatic slack adjusters
Heavy duty spring beam suspension
10 hole outboard hubs, stud piloted
255/70R x 22.5 LR H tires on 8.25x22.5 disc

ELECTRICAL SYSTEM:

7-Way electrical connector
Moisture-proof wiring system
Circuit breaker-protected lighting system
Sealed beam lights to DOT specifications
Wiring to DOT specifications

ASK ABOUT OTHER MODELS, LENGTHS OR DESIGNS

Note: Due to innovative company policy, specifications, designs, material subject to change without notice or obligations.

CUSTOM OPTIONS

Various lengths and widths

Additional lashing rings
Swingout widening brackets

Various suspensions
Beavertail with loading ramps

Complete power unit (model HPF)
T1 Fabricated Beam



HOLDEN INDUSTRIES, INC.
ROUTE 1, BOX 151
SOUTHWEST CITY, MISSOURI 64863