



40-50 Ton Mechanical Fold Lowboy Trailers



Optional Equipment Shown.

Holden Trailers

"Built as tough as the load they Haul"

A **Holden Trailer** is one you can be proud of today ... tomorrow ... and for many years to come ... because they are built to last! Maybe they are overbuilt ... we think so ... but our manufacturing policy is to provide the best trailer money can buy for your dollars invested.

A **Holden Trailer** gives you more, too, in design and features. The design is eye appealing .. combining

strength and stability with easy loading and low profile features ... and integrates capacity and brute strength into unsurpassed trailer engineering.

Need a specially designed trailer? Many customers do, and **Holden** will build a special model to fit your individual requirements. Whatever your needs, there is a **Holden** trailer that will do the job better.




HOLDEN INDUSTRIES, INC.

ROUTE 1, BOX 151
SOUTHWEST CITY, MISSOURI 64863

DEALER INFORMATION

40-50 TON

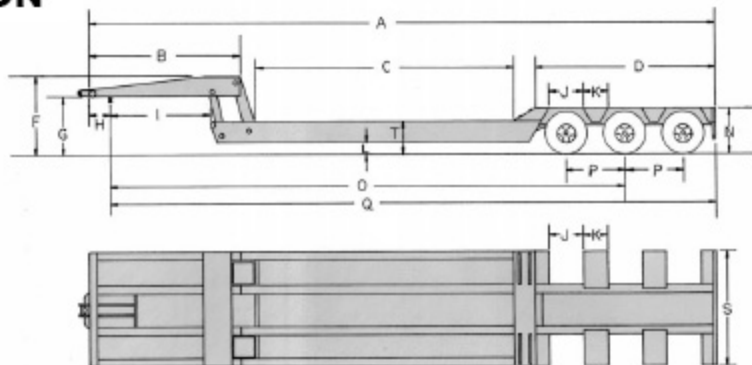

40 TON MODEL

A	43'4"
B	10'6"
C	18'
D	12'6"
E	N/A
F	54"
G	50"
H	18"
I	87"
J	25"
K	25"
L	10"
M	N/A
N	35 1/2"
O	35'10"
P	49 1/2"
Q	42'3"
R	96"
S	96"
T	26"

50 TON MODEL

A	44'1 1/2"
B	10'6 1/2"
C	18'
D	12'6"
E	N/A
F	57"
G	51"
H	18"
I	87"
J	30"
K	20"
L	10"
M	N/A
N	38 1/2"
O	36"
P	49 1/2"
Q	42'7 1/2"
R	96"
S	96"
T	28"

40 Ton Mechanical Fold - Triple Axles HMF 40 40 TON STANDARD SPECIFICATIONS

FRAME:
16" Wide flange main and outer rails
18" Platform ahead of axle openings
Double-drop design
Hardwood floor
Wide bolster in axle area
6 Heavy duty lashing rings per side
DOT bumper and mud flaps

RUNNING GEAR:
20,000# Axles with 12 1/2" x 7 1/2" air brakes
Automatic slack adjusters
Heavy duty 3-leaf spring suspension
3-Spoke hub and drum
215/75R 17.5 LR H tires on 6.75x17.5 rims

ELECTRICAL SYSTEM:
7-Way electrical connector
Moisture-proof wiring system
Circuit breaker-protected lighting system
Sealed beam lights to DOT specifications
Wiring to DOT specifications

50 Ton Mechanical Fold - Triple Axles HMF 50 50 TON STANDARD SPECIFICATIONS

FRAME:
18" Wide flange main and outer rails
18" Platform ahead of axle openings
Double-drop design
Hardwood floor
Wide bolster in axle area
8 Heavy duty lashing rings per side
DOT bumper and mud flaps

RUNNING GEAR:
22,500# Axles with 16 1/2" x 7" air brakes
Automatic slack adjusters
Heavy duty spring beam suspension
10 hole outboard hubs
255/70R x 22.5 LR H tires on 8.25x22.5 disc wheels

ELECTRICAL SYSTEM:
7-Way electrical connector
Moisture-proof wiring system
Circuit breaker-protected lighting system
Sealed beam lights to DOT specifications
Wiring to DOT specifications

ASK ABOUT OTHER MODELS, LENGTHS OR DESIGNS

Note: Due to innovative company policy, specifications, designs, material subject to change without notice or obligation.

40 TON AND 50 TON STANDARD OPTIONS

Tapered front approach
Apitong decking
Air actuated locking pins
Level deck design

Various lengths and widths
Swing-out widening brackets
Self-contained power pack
Disc wheels
Cast spoke wheels

Wet line kit
Various suspensions
Beaver tail with traction bars
Additional lashing rings



HOLDEN INDUSTRIES, INC.

ROUTE 1, BOX 151
SOUTHWEST CITY, MISSOURI 64863